

FORM PTO-1590 (REV. 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				1163-0350P	
				U.S. APPLICATION NO. (If known, see 37 CFR 1.5)	
INTERNATIONAL APPLICATION NO.		INTERNATIONAL FILING DATE		PRIORITY DATE CLAIMED	
PCT/JP00/08603		December 5, 2000		December 7, 1999	
TITLE OF INVENTION VIDEO ENCODING/TRANSMITTING DEVICE, VIDEO RECEIVING/DECODING DEVICE, VIDEO TRANSMITTING/RECEIVING DEVICE, AND VIDEO TRANSMISSION SYSTEM					
APPLICANT(S) FOR DO/EO/US YOSHIMOTO, Morio; MATSUDA, Yukinari and OKA, Susumu					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39 (1). 4. <input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31). 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau. 01/43443 A1 c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). a. <input checked="" type="checkbox"/> is transmitted herewith. b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4) 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)). a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input checked="" type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).					
Items 11. to 20. below concern document(s) or information included:					
11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.-1449 and International Search Report (PCT/ISA/210) w/ cited documents. 12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. 14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 15. <input type="checkbox"/> A substitute specification. 16. <input type="checkbox"/> A change of power of attorney and/or address letter. 17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821-1.825. 18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4). 19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4). 20. <input checked="" type="checkbox"/> Other items or information: Seven (7) sheets of formal drawings					

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

09/890435

INTERNATIONAL APPLICATION NO.

PCT/JP00/08603

ATTORNEY'S DOCKET NUMBER

1163-0350P

21. ☒ The following fees are submitted:**BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5):**

Neither international preliminary examination fee (37 CFR 1.482)

nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO

and International Search Report not prepared by the EPO or JPO. \$1,000.00

International preliminary examination fee (37 CFR 1.482) not paid to

USPTO but International Search Report prepared by the EPO or JPO. \$860.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO

but international search fee (37 CFR 1.445(a)(2)) paid to USPTO. \$710.00

International preliminary examination fee (37 CFR 1.482) paid to USPTO

but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690.00

International preliminary examination fee (37 CFR 1.482) paid to USPTO

and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(e)).**CALCULATIONS PTO USE ONLY**

\$ 860.00

\$ 0.00

CLAIMS

NUMBER FILED

NUMBER EXTRA

RATE

Total Claims

38 - 20 =

18

X \$18.00

\$ 324.00

Independent Claims

5 - 3 =

2

X \$80.00

\$ 160.00

MULTIPLE DEPENDENT CLAIM(S) (if applicable)

None

+ \$270.00

\$ 0.00

TOTAL OF ABOVE CALCULATIONS =

\$ 1,344.00

☐ Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are
reduced by 1/2.

\$

SUBTOTAL =

\$ 1,344.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(f)).

\$ 0.00

TOTAL NATIONAL FEE =

\$ 1,344.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

\$ 40.00

TOTAL FEES ENCLOSED =

\$ 1,384.00

Amount to be:
refunded \$
charged \$

- a. ☒ A check in the amount of \$ **1,384.00** to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account. No. _____ in the amount of \$ _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
overpayment to Deposit Account No. 02-2448.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR
1.137(a) or (b)) must be filed and granted to restore the application to pending status.

Send all correspondence to:

Birch, Stewart, Kolasch & Birch, LLP or Customer No. 2292

P.O. Box 747

Falls Church, VA 22040-0747

(703)205-8000

Date: July 30, 2001

By

John A. Castellano, 1163,094

SPECIFICATION

VIDEO ENCODING/TRANSMITTING DEVICE, VIDEO
RECEIVING/DECODING DEVICE, VIDEO TRANSMITTING/RECEIVING
DEVICE, AND VIDEO TRANSMISSION SYSTEM

This application is the national phase under 35 U.S.C. § 371 of PCT International Application No. PCT/JP00/08603 which has an International filing date of December 5, 2000, which designated the United States of America and was not published in English.

Technical Field

The present invention relates to a video encoding/transmitting device, a video receiving/decoding device, a video transmitting/receiving device, and a video transmission system, which are used for transmitting video and audio data via a given communication line, and more specifically, to a video encoding/transmitting device, a video receiving/decoding device, a video transmitting/receiving device, and a video transmission system, which use an object coding technique.

Background Art

Fig. 1 is a block diagram illustrating a conventional video encoding/transmitting device, which is described in JP-A-10-42275 for example. In Fig. 1, reference numeral 101 denotes a camera-signal processing unit for performing signal processing, such as NTSC (National Television System Committee) decoding, and A/D conversion, for a video signal from a video camera that shoots a video using an image pickup device such as CCD (Charge Coupled Device). Reference numeral 102 is a motion picture data encoding unit for encoding the A/D converted video signal as motion picture image data by means of a H.261 method. Reference numeral 103 is a still picture

data encoding unit for encoding the A/D converted video signal as still picture image data by means of a JPEG (Joint Photographic Experts Group) method. Reference numeral 104 is an image-data switching unit for switching image data for transmission. Reference numeral 105 is an audio-signal processing unit for performing signal processing, such as A/D conversion, for an audio signal from a microphone. Reference numeral 106 is an audio-data encoding unit for encoding the A/D converted audio signal. Reference numeral 107 is a multiplexing/demultiplexing unit for multiplexing image data and audio data. Reference numeral 108 is a line interface unit for transmitting the multiplexed data.

Next, operation will be described.

After the camera-signal processing unit 101 performs signal processing, such as NTSC decoding and A/D conversion, for a video signal from the video camera which shoots a video using the image pickup device such as a CCD, the motion picture data encoding unit 102 encodes the A/D converted video signal as motion picture data by means of the H.261 method; and the still picture data encoding unit 103 encodes the A/D converted video signal as still picture image data by means of the JPEG method.

Then, the image-data switching unit 104 switches image data to be transmitted in accordance with movement of an object in an image, and supplies either motion picture image data or still picture image data to the multiplexing/demultiplexing unit 107.

On the other hand, after the audio-signal processing unit 105 performs signal processing, such as A/D conversion, for an audio signal from the microphone, the audio-data encoding unit 106 encodes the A/D converted audio signal, and supplies the encoded audio data to the multiplexing/demultiplexing unit 107.

After that, the multiplexing/demultiplexing unit 107 multiplexes the image data and the audio data, and the line

interface unit 108 transmits the multiplexed data via a communication line such as an ISDN line.

It should be noted that, an invention, which is related to the above-mentioned prior art, is described in JP-A-7-154765.

Since the conventional video encoding/transmitting device is configured as described above, unnecessary background information is contained in the video data. Therefore, this results in the following problems: it is difficult to decrease the quantity of transmitted data; and a caller's sending place is identified on the receiving side.

The present invention has been made to solve the problems as described above, and has the object of providing a video encoding/transmitting device, a video transmitting/receiving device, and a video transmission system, which can transmit a video signal in such a manner that a caller's sending place is not identified on the receiving side, by object-encoding a video signal on the transmission side, combining a part or all of the encoded objects with an object object-coded in advance, and transmitting the combined video data.

Moreover, the present invention has the further object of providing a video receiving/decoding device, a video transmitting/receiving device, and a video transmission system, which can transmit a video signal in such a manner that a caller's sending place is not identified on the receiving side, and which can decrease the quantity of transmitted data, by object-encoding a video signal on the transmission side, transmitting only a part of the encoded object, combining the received object with an object object-coded in advance on the receiving side, and decoding the combined video data.

Disclosure of the Invention

A video encoding/transmitting device according to

the present invention comprises: a medium encoding means for object-encoding a video signal supplied from the outside; a transmission stream composite means for combining a part or all of objects encoded by the medium encoding means, with an object which is object-encoded in advance; and a stream transmitting means for transmitting video data combined by the transmission stream composite means.

This produces the following advantageous effects: a video signal can be transmitted in such a manner that a caller's sending place is not identified on the receiving side; and the quantity of the transmitted data can be decreased.

A video encoding/transmitting device according to the present invention further comprises a stream storage means for storing objects which are object-encoded in advance.

In this arrangement, since transmission of only a part of the objects is required, the following advantageous effects are obtained: the quantity of the transmitted data can be decreased; and it is possible to prevent a caller's sending place from being identified on the receiving side.

A video encoding/transmitting device according to the present invention is so adapted that as a background, the transmission stream composite means combines video data, which is output from a stream storage means, with the video data encoded by the medium encoding means.

In this arrangement, since transmission of only a part of the objects is required, the following advantageous effects are obtained: the quantity of the transmitted data can be decreased; and it is possible to prevent a caller's sending place from being identified on the receiving side.

A video encoding/transmitting device according to the present invention is such that the video data is a motion picture image data or a still picture image data.

This produces an advantageous effect of preventing a

caller's sending place from being identified on the receiving side.

A video encoding/transmitting device according to the present invention further comprises a control means for controlling the transmission stream composite means in accordance with a communication destination.

This allows an object included in the video data, which will be transmitted, to be changed in accordance with the destination. Therefore, the following advantageous effects are obtained: it is possible to prevent a caller's sending place from being identified on the receiving side; and the quantity of the transmitted data can be decreased.

A video encoding/transmitting device according to the present invention is such that after synthesizing an audio signal supplied from the outside with an audio signal, which has been obtained in advance, audio data corresponding to the synthesized audio signal is transmitted together with the video data.

This produces an advantageous effect of preventing a caller's sending place from being identified on the receiving side.

A video encoding/transmitting device according to the present invention is such that the transmission stream composite means synthesizes audio data supplied from the outside, or audio data supplied from the stream storage means, with video data supplied from the outside or video data supplied from the stream storage means.

This produces an advantageous effect of preventing a caller's sending place from being identified on the receiving side.

A video encoding/transmitting device according to the present invention is such that an object, which is object-encoded in advance, is read from the stream storage means.

This produces the following advantageous effects: exchanging objects to be combined is facilitated;

portability of the object to be combined is increased; and it is possible to combine a background object of a place that has not been visited, for example.

A video encoding/transmitting device according to the present invention is adapted such that the stream storage means stores either or both of video data and audio data, which are object-encoded in advance.

This produces an advantageous effect of preventing a caller's sending place from being identified on the receiving side.

A video encoding/transmitting device according to the present invention is adapted such that the control means selects an object output from a stream storage means, in which a plurality of object-encoded objects are stored, according to a communication destination or communication date and time.

This produces the following advantageous effects: it is possible to prevent a caller's sending place from being identified at a destination on the receiving side; and the quantity of the transmitted data can be decreased.

A video encoding/transmitting device according to the present invention is adapted such that video data and audio data are generated as a result of encoding by means of MPEG-4 method.

This produces an advantageous effect of enabling wide utilization of the present invention when equipment designed for MPEG-4 method becomes prevalent.

A video receiving/decoding device according to the present invention comprises: a stream receiving means for receiving object-encoded video data; a received-stream composite means for combining a part or all of objects in the video data received by the stream receiving means, with an object that is object-encoded in advance; and a medium decoding means for decoding the video data combined by the received-stream composite means.

This produces the following advantageous effects: a

video signal can be transmitted in such a manner that a caller's sending place is not identified on the receiving side; and the quantity of the transmitted data can be decreased.

A video receiving/decoding device according to the present invention further comprises a stream storage means for storing an object that is object-encoded in advance.

In this arrangement, since transmission of only a part of object is required, the following advantageous effects are produced: the quantity of the transmitted data can be decreased; and it is possible to prevent a caller's sending place from being identified on the receiving side.

A video receiving/decoding device according to the present invention is adapted such that as a background, the transmission stream composite means synthesizes video data, which is output from a stream storage means, with video data received by the stream receiving means.

In this arrangement, since transmission of only a part of object is required, the following advantageous effects are produced: the quantity of the transmitted data can be decreased; and it is possible to prevent a caller's sending place from being identified on the receiving side.

A video receiving/decoding device according to the present invention is adapted such that the video data is a motion picture image data or a still picture image data.

This produces an advantageous effect of preventing a caller's sending place from being identified on the receiving side.

A video receiving/decoding device according to the present invention is adapted such that an object corresponding to a person part received by the stream receiving means is combined with an object corresponding to a background part that has been object-encoded in advance.

In this arrangement, since transmission of only a part of object is required, the following advantageous effects are produced: the quantity of the transmitted data

can be decreased; and it is possible to prevent a caller's sending place from being identified on the receiving side.

A video receiving/decoding device according to the present invention further comprises a control means for controlling the received-stream composite means in response to a source.

This produces the following advantageous effects: in response to a source, it is possible to select, as necessary, whether or not an object is combined; and thereby the quantity of the transmitted data can be decreased.

A video receiving/decoding device according to the present invention is so adapted that an audio signal corresponding to audio data received by the stream receiving means is synthesized with an audio signal, which has been obtained in advance.

This produces an advantageous effect of preventing a caller's sending place from being identified on the receiving side.

A video receiving/decoding device according to the present invention is so adapted that the received-stream synthesizing means synthesizes audio data supplied from the outside, or audio data supplied from the stream storage means, with video data supplied from the outside or video data supplied from the stream storage means.

This produces the following advantageous effects: a video signal can be transmitted in such a manner that a caller's sending place is not identified on the receiving side; and the quantity of the transmitted data can be decreased.

A video receiving/decoding device according to the present invention is adapted such that an object, which has been object-encoded in advance, is read from the stream storage means.

This produces the following advantageous effects: exchanging objects to be combined is facilitated;

portability of the object to be combined is increased, for example, it is possible to combine a background object of a place that has not been visited.

A video receiving/decoding device according to the present invention is adapted such that the stream storage means stores either or both of the video data and the audio data, which have been object-encoded in advance.

This produces the following advantageous effects: a video signal can be transmitted in such a manner that a caller's sending place is not identified on the receiving side; and the quantity of the transmitted data can be decreased.

A video receiving/decoding device according to the present invention is adapted such that the control means selects an object output from the stream storage means, in which a plurality of object-encoded objects are stored, according to a communication destination or communication date and time.

This produces an advantageous effect of preventing a caller's sending place from being identified on the receiving side.

A video receiving/decoding device according to the present invention is adapted such that video data and audio data are generated as a result of encoding by means of MPEG-4 method.

This produces an advantageous effect of enabling wide utilization of the present invention when equipment designed for MPEG-4 method becomes prevalent.

A video transmitting/receiving device according to the present invention comprises:

a transmission processing unit having:

a medium encoding means for object-encoding either or both of a video signal and an audio signal supplied from the outside;

a transmission stream composite means for combining a part or all of objects encoded by the medium encoding

means, with an object which is object-encoded in advance;
and

a stream transmitting means for transmitting either
or both of video data and audio data combined by the
transmission stream composite means; and

a receiving processing unit having:

a stream receiving means for receiving either or
both of video data and audio data which are object-encoded;

a received-stream composite means for combining an
object in either or both of the video data and the audio
data received by the stream receiving means, with an object
which is object-encoded in advance; and

a medium decoding means for decoding either or both
of the video data and the audio data combined by the
received-stream composite means.

This produces the following advantageous effects:
two-way communication becomes possible without greatly
increasing a circuit scale; a video signal can be
transmitted in such a manner that a caller's sending place
is not identified on the receiving side; and the quantity
of transmitted data can be decreased.

A video transmission system according to the present
invention comprises:

a video encoding/transmitting device having:

a medium encoding means for object-encoding either
or both of a video signal and an audio signal supplied from
the outside;

a transmission stream composite means for combining
a part or all of objects encoded by the medium encoding
means, with an object which is object-encoded in advance;
and

a stream transmitting means for transmitting either
or both of video data and audio data combined by the
transmission stream composite means; and

a receiving device for receiving and decoding either or
both of the video data and the audio data from the video

encoding/transmitting device.

This produces the following advantageous effects: two-way communication becomes possible without greatly increasing a circuit scale; a video signal can be transmitted in such a manner that a caller's sending place is not identified on the receiving side; and the quantity of the transmitted data can be decreased.

A video transmission system according to the present invention comprises:

a transmission device that object-encodes either or both of a video signal and an audio signal supplied from the outside, and that transmits a part of objects in either or both of the video data and the audio data, which are object-encoded; and

a video receiving/decoding device having:

a stream receiving means for receiving either or both of the video data and the audio data, which are object-encoded, from the transmission device;

a received-stream composite means for combining an object in either or both of the video data and the audio data received by the stream receiving means, with an object which is object-encoded in advance; and

a medium decoding means for decoding either or both of the video data and the audio data combined by the received-stream composite means.

This produces the following advantageous effects: two-way communication becomes possible without greatly increasing a circuit scale; a video signal can be transmitted in such a manner that a caller's sending place is not identified on the receiving side; and the quantity of the transmitted data can be decreased.

Brief Description of the Drawings

Fig. 1 is a block diagram illustrating a conventional video encoding/transmitting device.

Fig. 2 is a block diagram illustrating a

configuration of a video encoding/transmitting device according to a first embodiment of the present invention.

Fig. 3 is a block diagram illustrating a configuration of a video receiving/decoding device according to a second embodiment of the present invention.

Fig. 4 is a block diagram illustrating a configuration of a video transmitting/receiving device according to a third embodiment of the present invention.

Fig. 5 is a diagram illustrating an example of a network equipped with a video transmission system according to a fourth embodiment of the present invention.

Fig. 6 is a block diagram illustrating a configuration of a video transmission system according to the fourth embodiment of the present invention.

Fig. 7 is a block diagram illustrating a configuration of a video transmission system according to a fifth embodiment of the present invention.

Best Mode for Carrying out the Invention

For the purpose of describing the present invention in more detail, best modes for embodying the invention will be described with reference to attached drawings as below.

First Embodiment

Fig. 2 is a block diagram illustrating a configuration of a video encoding/transmitting device according to a first embodiment of the present invention. In Fig. 1, reference numeral 1 denotes an object dividing unit for processing a video signal from a camera, which uses an image pickup device such as CCD to shoot a video, and for dividing video data into objects. Reference numeral 2 is an object encoding unit (a medium encoding means) for object-encoding a video signal by a predetermined object encoding method such as, for example, an MPEG (Moving Picture Experts Group)-4 method, according to data from the object dividing unit 1. Reference numeral

3 is an object composite unit (a transmission stream composite means) for synthesizing the object-encoded video data from the object encoding unit 2 with video data, audio data, etc. which are encoded in advance and are stored in a recording medium 4 (a stream storage means).

Reference numeral 4 is a recording medium such as a flash memory and a disk-type recording medium (an optical disk, a magnetic disk, and a magneto-optical disk), which store object-encoded video data and encoded audio data supplied from the object encoding unit 2, an audio encoding unit (a media encoding means) 6, and from the outside.

Reference numeral 5 is an audio adding unit (a voice synthesizing means) for adding an audio signal inputted from a microphone, or the like, to an audio signal decoded by an audio decoding unit 7. Reference numeral 6 is the audio encoding unit for encoding an audio signal from the audio adding unit 5 using a given method. Reference numeral 7 is the audio decoding unit for decoding the encoded audio data stored in the recording medium 4.

Reference numeral 8 is a line interface unit (a stream transmitting means) for transmitting data from the object composite unit 3 to the receiving side via a given communication line.

Reference numeral 9 is a call control unit (a control means) for controlling the object composite unit 3 and the recording medium 4 in response to control information for transmission and a device at communication destination on the receiving side.

Next, operation will be described.

When a video signal is supplied, the object dividing unit 1 processes the video signal according to movement and color information, and divides video data into objects. Then, the object encoding unit 2 object-encodes the divided objects.

The object-encoded video data is supplied to the object composite unit 3 or the recording medium 4. It

should be noted that, as necessary, the video data is supplied to both of the object composite unit 3 and the recording medium 4.

When the video data is supplied to the object composite unit 3, the object composite unit 3 composites a part or all of the objects with an object in the recording medium 4, which is object-encoded in advance. Then, the object composite unit 3 supplies the combined data to the line interface unit 8. For example, from among the object-encoded video data, an object corresponding to a person part as a caller is combined with video data of a background part, which has been object-encoded in advance.

In this case, in response to a control signal from the call control unit 9, the object composite unit 3 supplies a part (for example, an object corresponding to a person part in the video) or all of the object-encoded video data, which is supplied from the object encoding unit 2, to the line interface unit 8 as it is, or supplies the combined data to the line interface unit 8. For example, the combined data from the object composite unit 3 is supplied to the line interface unit 8 only when transmitting video data to a predetermined communication destination.

The line interface unit 8 transmits the supplied data to a terminal equipment on the receiving side, which is a communication destination, via a given communication line.

On the other hand, when the video data is supplied, the recording medium 4 stores the video data. After that, the video data stored in the recording medium 4 is properly utilized as video data (an object) that is combined in real time in the object composite unit 3 at the time of communication.

In addition, when an audio signal is supplied from the microphones or the like, the audio adding unit 5 synthesizes the audio signal with an audio signal which is

decoded from an audio data in the recording medium 4 by the audio decoding unit 7. Then, the audio adding unit 5 supplies the synthesized audio signal to the audio encoding unit 6. The audio encoding unit 6 encodes the audio signal, and supplies the encoded audio data to the object composite unit 3 or the recording medium 4. It should be noted that the encoded audio data is supplied to both of the object composite unit 3 and the recording medium 4 as necessary.

When the audio data is supplied to the object composite unit 3, the object composite unit 3 combines the audio data with the above-mentioned video data (object).

On the other hand, when the audio data is supplied to the recording medium 4, the recording medium 4 stores the audio data. After that, the audio data stored in the recording medium 4 is decoded in real time by the audio decoding unit 7 at the time of communication. The decoded audio signal is properly utilized as an audio signal that will be synthesized in the audio adding unit 5.

In addition, the call control unit 9 controls the object composite unit 3 and the recording medium 4 according to information about communication date and time, information about a communication destination and the like. The call control unit 9 thereby permits the video data and the audio data, which are encoded in advance, to be supplied to the object composite unit 3. Therefore, it is possible to permit a background image to be exchanged only for a specific communication destination, or to prevent the background image from being exchanged. Additionally, the background image can be exchanged in accordance with a communication destination. Therefore, a combination of a background and audio can be selected in accordance with a schedule, an event, and time of the year. Moreover, it is also possible to transmit an image, which has been stored in advance, instead of transmitting video image at a location where the video image is now being sent. Therefore, a time-shift function can be realized.

In addition, the call control unit 9 gives and receives control information to and from a communication destination, and judges whether or not terminal equipment of the communication destination supports object encoding. Therefore, the call control unit 9 can identify automatically whether or not this method should be used for transmission.

As described above, according to the first embodiment, a video signal is object-encoded on the transmission side; a part or all of the encoded objects is combined with an object that has been object-encoded in advance; and the combined video data is transmitted. Therefore, the following advantageous effect is obtained: combining an object corresponding to a person part in the video with an object corresponding to a background part which has been encoded in advance, in real time allows the video to be transmitted in such a manner that a caller's sending place is not identified on the receiving side.

Moreover, according to the first embodiment, a background to be combined can be exchanged according to the information about date and time. This produces an advantageous effect of hiding a sending place of a caller more naturally.

In addition, according to the first embodiment, an audio signal supplied externally is synthesized with an audio signal, which has been obtained in advance; and audio data corresponding to the audio signal is transmitted together with the video data. This produces a further advantageous effect of preventing a caller's sending place from being identified on the receiving side.

Moreover, according to the first embodiment, since audio to be combined is exchanged according to information about date and time, it is possible to hide a sending place of a caller more naturally.

In addition, according to the first embodiment, the call control unit 9 automatically judges whether or not the

terminal equipment of a communication destination supports object encoding. Therefore, an advantageous effect of decreasing the quantity of transmitted data can be obtained by the following: for a specific communication destination, a background of the video data, which is object-encoded, is not transmitted in real time; instead of it, only an object corresponding to a person part is transmitted; and an object corresponding to a background part is combined in the terminal equipment on the receiving side.

In addition, since an object which is object-encoded in advance is read from the recording medium 4, the following advantageous effects can be obtained: exchanging the objects to be combined is facilitated; portability of the objects to be combined is increased; and it is possible to combine a background object of a place that has not been visited, for example.

Furthermore, since MPEG-4 method is used for encoding to generate the video data and the audio data, it is possible to widely utilize the present invention when equipment designed for MPEG-4 method becomes prevalent.

Second Embodiment

Fig. 3 is a block diagram illustrating a configuration of a video receiving/decoding device according to a second embodiment of the present invention. In Fig. 3, reference numeral 11 denotes a line interface unit (a stream receiving means) for receiving data transmitted via a communication line. Reference numeral 12 is an object separating unit for separating the received data into an object of video data and an object of audio data.

Reference numeral 13 is a recording medium (a stream storage means) such as a flash memory and a disk-type recording medium (an optical disk, a magnetic disk, and a magneto-optical disk), which stores object-encoded video data and encoded audio data supplied from the object

separating unit 12, an object encoding unit 20, an audio encoding unit 21, and from the outside.

Reference numeral 14 is an object composite unit (a received-stream composite means) for combining a part or all of the objects of video data from the object separating unit 12, with video data that is stored in the recording medium 13 and that has been object-encoded in advance. Reference numeral 15 is an object decoding unit (a medium decoding means) for decoding the video data supplied from the object composite unit 14.

Reference numeral 16 is an audio decoding unit (a medium decoding means) for decoding the audio data supplied from the object separating unit 12. Reference numeral 17 is an audio decoding unit (a medium decoding means) for decoding audio data that is stored in the recording medium 13 and that has been encoded in advance. Reference numeral 18 is an audio adding unit (a voice synthesizing means) for synthesizing the audio signal from the audio decoding unit 16 with the audio signal from the audio decoding unit 17, and for outputting the synthesized signal.

Reference numeral 19 is an object dividing unit for processing a video signal from a camera, which uses an image pickup device such as CCD to shoot a video, and for dividing video data into objects. Reference numeral 20 is the object encoding unit (a medium encoding means) for object-encoding a video signal by means of a given object encoding method including, for example, an MPEG 4 method, according to data from this object dividing unit 19. Reference numeral 21 is the audio encoding unit (a medium encoding means) for encoding an audio signal from the outside using a given method.

Reference numeral 22 is a call control unit (a control means) for controlling the recording medium 13 and the object composite unit 14 in accordance with the received control information and a device at communication destination on the transmission side.

Next, operation will be described.

The line interface unit 11 receives data transmitted via a line. The object separating unit 12 separates the data into video data and audio data, supplies the video data to the recording medium 13 or the object composite unit 14, or to both of them, and supplies the audio data to the recording medium 13 or the audio decoding unit 16, or to both of them. The video data and the audio data are stored in the recording medium 13. The video data and the audio data stored in the recording medium 13 are properly utilized as data to be combined in real time with video data and audio data, which will be received thereafter.

Next, the object composite unit 14 combines a part or all of objects of the video data with the video data stored in the recording medium 13 according to a control signal from the call control unit 22, and supplies the combined video data to the object decoding unit 15. The object decoding unit 15 decodes the video data from the object composite unit 14, and outputs the decoded video signal.

For example, if the object-encoded video data is made up of an object corresponding to a person part and an object corresponding to a background part, the object corresponding to a person part is combined with another object corresponding to a background stored in the recording medium 13.

In addition, for example, if the object-encoded video data is made up of only an object corresponding to a person part, the object corresponding to a person part is combined with an object corresponding to a background stored in the recording medium 13.

On the other hand, when the audio data is supplied, the audio decoding unit 16 decodes the audio data, and supplies the decoded audio signal to the audio adding unit 18. In addition, the audio decoding unit 17 decodes the audio data that is stored in the recording medium 13 and

that has been encoded in advance. Then, the audio decoding unit 17 supplies the decoded audio signal to the audio adding unit 18. After that, the audio adding unit 18 synthesizes the audio signal from the audio decoding unit 16 with the audio signal from the audio decoding unit 17, and outputs the synthesized audio signal.

Moreover, it is possible to store video data, which is object-encoded by the object dividing unit 19 and the object encoding unit 20, in the recording medium 13, and to use the video data as data to be combined with the received video data in real time. Additionally, it is also possible to store audio data, which is encoded by the audio encoding unit 21, in the recording medium 13, and to use the audio data as data to be combined with the received audio data in real time.

In addition, the call control unit 22 controls the recording medium 13 and the object composite unit 14 according to information about communication date and time, information about a communication destination, and the like. The call control unit 22 thereby permits the video data and the audio data, which are encoded in advance, to be supplied to the object composite unit 14 and the audio decoding unit 17. Therefore, it is possible to permit a background image to be exchanged only for a specific communication destination, or to prevent the background image from being exchanged. Additionally, the background image can be exchanged in accordance with a communication destination. Therefore, a combination of a background and audio can be selected in accordance with a schedule, an event, and time of the year.

In addition, the call control unit 22 communicates with transmission-side terminal equipment of a communication destination, and automatically judges whether or not this method is used in the equipment on the transmission side. Accordingly, reception process corresponding to the method can be performed. In addition,

the following processing is also possible: supplying a control signal from the transmission side to the receiving side as required; storing video data from the transmission side at the beginning of communication in the recording medium 13; after that, transmitting only video data corresponding to a person part from the transmission side; and concerning a background, combining the background with the video data at the beginning of communication, which has been stored in the recording medium 13. In this case, the background may be combined with the video data and the audio data in response to a schedule, an event, and time of the year, according to information about date and time.

As described above, according to the second embodiment, object-encoded video data from the transmission side is received ; a part or all of the received objects is combined with an object, which has been object-encoded in advance; and the combined video data is decoded. Therefore, the following advantageous effect is obtained: combining an object corresponding to a person part in the video with an object corresponding to a background part, which has been encoded in advance, in real time allows the video to be transmitted in such a manner that a caller's sending place is not identified on the receiving side.

Moreover, according to the second embodiment, a background to be combined is exchanged according to information about date and time. This produces an advantageous effect of hiding a sending place of a caller more naturally.

To be more specific, exchanging a background part (excluding a person part) of the object-encoded video data, which is received by the object composite unit 14, with a background part of the video data, which is stored in the recording medium 13, in real time allows the video data to have a different background that does not relate to a position where the video image is now being sent. For this reason, even if there is no function of exchanging a

background part on the transmission side as shown in the first embodiment, identification of the position, where the video image is now being sent, on the receiving side becomes difficult.

In addition, according to the second embodiment, audio signal, which is generated by decoding audio data from the transmission side, is synthesized with the audio signal that has been obtained in advance. This produces a further advantageous effect of preventing a caller's sending place from being identified on the receiving side.

Moreover, according to the second embodiment, audio to be synthesized is exchanged according to information about date and time. This produces an advantageous effect of hiding a sending place of a caller more naturally.

In addition, according to the second embodiment, only an object corresponding to a person part, which is a part of video, is received from the transmission side; and a background part of the video data, which is object-encoded in advance, is combined in real time. Therefore, only a part of the objects is required to be transmitted. This produces an advantageous effect of decreasing the quantity of the transmitted data.

Third Embodiment

Fig. 4 is a block diagram illustrating a configuration of a video transmitting/receiving device according to a third embodiment of the present invention. In Fig. 4, reference numerals 31 through 38 denote an object dividing unit, an object encoding unit, an object composite unit, a recording medium, an audio adding unit, an audio encoding unit, an audio decoding unit, and a line interface unit respectively, which are equivalent to those shown in the first embodiment. Reference numerals 41 through 44 are an object separating unit, an object composite unit, an object decoding unit, and an audio decoding unit respectively, which are equivalent to the

object separating unit 12, the object composite unit 14, the object decoding unit 15, and the audio decoding unit 16 as shown in the second embodiment. Reference numeral 39 is a call control unit which has the function of the call control unit 9 in the first embodiment and the function of the call control unit 22 in the second embodiment.

In this connection, a transmission processing unit is constituted by the object dividing unit 31, the object encoding unit (a medium encoding means) 32, the object composite unit (a transmission stream composite means) 33, the recording medium (a stream storage means) 34, the audio adding unit (a voice synthesizing means) 35, the audio encoding unit (a medium encoding means) 36, the audio decoding unit (a medium decoding means) 37, the line interface unit (a stream transmitting means) 38, and the call control unit 39. A reception processing unit is constituted by the line interface unit (a stream receiving means) 38, the object separating unit 41, the recording medium (a stream storage means) 34, the object composite unit (a received-stream composite means) 42, the object decoding unit (a medium decoding means) 43, the audio decoding unit (a medium decoding means) 44, the audio adding unit 35, the audio decoding unit (a medium decoding means) 37, and the call control unit 39. In other words, the recording medium 34, the audio adding unit 35, the audio decoding unit 37, and the line interface unit 38 are used for both of the transmission processing unit and the reception processing unit.

In addition, the video transmitting/receiving device shown in Fig. 4 can be realized by adding the object dividing unit 31, the object encoding unit 32, the object composite unit 33, and the audio encoding unit 36 to the video receiving/decoding device shown in Fig. 3. That is to say, it is possible to realize the video transmitting/receiving device easily by making a slight change in the video receiving/decoding device.

Next, operation will be described.

The above-mentioned transmission processing unit operates in a manner similar to the video encoding/transmitting device according to the first embodiment. The above-mentioned reception processing unit operates in a similar manner to the video receiving/decoding device according to the second embodiment.

As described above, according to the third embodiment, since the above-mentioned transmission processing unit and reception processing unit are provided, two-way communication becomes possible. In addition, the same advantageous effects as those of the first embodiment and those of the second embodiment can be obtained.

Moreover, according to the third embodiment, a part of the transmission processing unit and a part of the reception processing unit can commonly be used. Therefore, it is possible to achieve the same advantageous effects as those of the first embodiment and those of the second embodiment without increasing a circuit scale to a large extent.

Fourth Embodiment

Fig. 5 is a diagram illustrating an example of a network equipped with a video transmission system according to a fourth embodiment of the present invention. Fig. 6 is a block diagram illustrating a configuration of a video transmission system according to the fourth embodiment of the present invention.

In Fig. 5, reference numerals 61 through 63 denote terminal equipments, each of which is connected to a network 64 using a given line (for example, a pay phone line, and a cellular phone line), and that has the same video encoding/transmitting device as that of the first embodiment.

In Fig. 6, reference numeral 71 is the same video

encoding/transmitting device as that of the first embodiment, that processes a video signal from an image pickup device 72 such as a CCD camera and an audio signal from a sound collector 73 such as a microphone, and that transmits the video data and the audio data to the other terminal equipment. Reference numeral 74 is a receiving device for performing the following: receiving video data and audio data from the other terminal equipment using a line interface unit 77; decoding each of the data using a decoding unit 78; supplying the video signal to a display unit 75 such as a display; and supplying the audio signal to an audio output device 76 such as a speaker.

Next, operation will be described.

As is the case with the first embodiment, in each of the terminal equipments 61 and 62, the video encoding/transmitting device 71 encodes a video signal and an audio signal. The encoded data is transmitted to the other terminal equipments 62 or 61 via the network 64. After that, the data is received by the receiving device 74 in the other terminal equipment 62 or 61, and is decoded into a video signal and an audio signal.

As described above, according to the fourth embodiment, since the video encoding/transmitting device according to the first embodiment is used for the video transmission system, it is possible to obtain the same advantageous effects as those of the first embodiment in the video transmission system for transferring video and audio between remote locations.

Fifth Embodiment

Fig. 7 is a block diagram illustrating a configuration of a video transmission system according to a fifth embodiment of the present invention. In Fig. 7, reference numeral 81 denotes a transmission device for object-encoding a video signal from an image pickup device 72 such as a CCD camera and an audio signal from a sound

collector 73 such as a microphone using an encoding unit 82, and for transmitting video data and audio data to the other terminal equipment using a line interface unit 83. Reference numeral 84 is a video receiving/decoding device equivalent to the video receiving/decoding device according to the second embodiment that processes video data and audio data from the other terminal equipment, and that outputs the video signal and the audio signal to the display unit 75 and the audio output device 76.

Next, operation will be described.

In each of the terminal equipments 61 and 62, the transmission device 81 object-encodes a video signal and an audio signal. The encoded data is transmitted to the other terminal equipment 62 or 61 via the network 64. After that, as is the case with the second embodiment, the data is received by the video receiving/decoding device 84 in the other terminal equipment 62 or 61, and is decoded into a video signal and an audio signal. In this case, transmitting only a part of objects of the video data from the transmission device 81 results in a decrease in the quantity of the transmitted data.

As described above, according to the fifth embodiment, since the video receiving/decoding device according to the second embodiment is used for the video transmission system, it is possible to obtain the same advantageous effects as those of the second embodiment in the video transmission system for transferring video and audio between remote locations.

It should be noted that, instead of the transmission device 81 and the video receiving/decoding device 84 in the fifth embodiment, the video transmitting/receiving device according to the third embodiment may be used.

Industrial Applicability

As described above, the video encoding/transmitting device, the video receiving/decoding device, the video

transmitting/receiving device, and the video transmission system, according to the present invention, are suitable for transmitting video in a manner that a caller's sending place is not identified on the receiving side; and further, they are suitable for decreasing the quantity of the transmitted data.

CLAIMS

1. A video encoding/transmitting device comprising:
a medium encoding means for object-encoding a video signal supplied from the outside;
a transmission stream composite means for combining a part or all of objects encoded by the medium encoding means, with an object which is object-encoded in advance; and
a stream transmitting means for transmitting video data combined by the transmission stream composite means.
2. A video encoding/transmitting device according to Claim 1, further comprising a stream storage means for storing objects which are object-encoded in advance.
3. A video encoding/transmitting device according to Claim 2, wherein, as a background, the transmission stream composite means combines video data, which is output from the stream storage means, with video data encoded by the medium encoding means.
4. A video encoding/transmitting device according to Claim 3, wherein said video data is a motion picture image data.
5. A video encoding/transmitting device according to Claim 3, wherein said video data is a still picture image data.
6. A video encoding/transmitting device according to Claim 1, further comprising a control means for controlling the transmission stream composite means in accordance with a communication destination.
7. A video encoding/transmitting device according to

Claim 2, further comprising a control means for controlling the transmission stream composite means in accordance with a communication destination.

8. A video encoding/transmitting device according to Claim 1, further comprising a voice synthesizing means for synthesizing an audio signal supplied from the outside with an audio signal which is obtained in advance, wherein the stream transmitting means transmits audio data corresponding to the audio signal synthesized by the voice synthesizing means, together with the video data.

9. A video encoding/transmitting device according to Claim 1, further comprising a voice synthesizing means for synthesizing an audio signal supplied from the outside with an audio signal which is obtained in advance, wherein the transmission stream composite means combines audio data corresponding to the audio signal synthesized by the voice synthesizing means, with the video data.

10. A video encoding/transmitting device according to Claim 2, wherein the transmission stream composite means reads an object, which is object-encoded in advance, from the stream storage means.

11. A video encoding/transmitting device according to Claim 10, wherein the audio data is output from the stream storage means.

12. A video encoding/transmitting device according to Claim 2, wherein the stream storage means stores either or both of the video data and the audio data, which are object-encoded in advance.

13. A video encoding/transmitting device according to Claim 2, further comprising a voice synthesizing means

for synthesizing an audio signal supplied from the outside with an audio signal which is obtained in advance, wherein the transmission stream composite means combines audio data corresponding to the audio signal synthesized by the voice synthesizing means, with the video data output from the stream storage means.

14. A video encoding/transmitting device according to Claim 7, wherein the control means selects an object output from the stream storage means, in which a plurality of object-encoded objects are stored, according to a communication destination.

15. A video encoding/transmitting device according to Claim 7, wherein the control means selects an object output from the stream storage means, in which a plurality of object-encoded objects are stored, according to communication date and time.

16. A video encoding/transmitting device according to Claim 1, wherein the video data is encoded by means of an MPEG-4 method.

17. A video encoding/transmitting device according to Claim 8, wherein the audio data is encoded by means of an MPEG-4 method.

18. A video receiving/decoding device comprising:
a stream receiving means for receiving object-encoded video data;

a received-stream composite means for combining a part or all of objects in the video data received by the stream receiving means, with an object which is object-encoded in advance; and

a medium decoding means for decoding the video data combined by the received-stream composite means.

19. A video receiving/decoding device according to Claim 18, further comprising a stream storage means for storing objects which is object-encoded in advance.

20. A video receiving/decoding device according to Claim 19, wherein the received-stream composite means combines video data as a background, which is output from the stream storage means, with the video data received by the stream receiving means.

21. A video receiving/decoding device according to Claim 20, wherein the video data is a motion picture image data.

22. A video receiving/decoding device according to Claim 20, wherein the video data is a still picture image data.

23. A video receiving/decoding device according to Claim 18, wherein the received-stream composite means combines an object corresponding to a person part, which is received by the stream receiving means, with an object corresponding to a background part, which is object-encoded in advance.

24. A video receiving/decoding device according to Claim 19, further comprising a control means for controlling the received-stream composite means in response to a source.

25. A video receiving/decoding device according to Claim 18, wherein:

the stream receiving means receives audio data together with the video data; and

the video receiving/decoding device comprises a

voice synthesizing means for synthesizing an audio signal corresponding to the audio data received by the stream receiving means, with an audio signal which is obtained in advance.

26. A video receiving/decoding device, according to Claim 18, wherein said video receiving/decoding device further comprises a voice synthesizing means for synthesizing an audio signal received from the stream receiving means with an audio signal which is obtained in advance, the received-stream composite means combines audio data corresponding to the audio signal synthesized by the voice synthesizing means, with the video data.

27. A video receiving/decoding device according to Claim 19, wherein the received-stream composite means reads an object, which is object-encoded in advance, from the stream storage means.

28. A video receiving/decoding device according to Claim 26, wherein the audio data is output from the stream storage means.

29. A video receiving/decoding device according to Claim 19, wherein the stream storage means stores either or both of the video data and the audio data, which is object-encoded in advance.

30. A video receiving/decoding device according to Claim 19, wherein said video receiving/decoding device further comprises a voice synthesizing means for synthesizing an audio signal received from the stream receiving means with an audio signal which is obtained in advance, the received-stream composite means combines audio data corresponding to the audio signal synthesized by the voice synthesizing means with the video data which is

output from the stream storage means.

31. A video receiving/decoding device according to Claim 19, wherein said video receiving/decoding device further comprises a voice synthesizing means for synthesizing an audio signal received from the stream receiving means with an audio signal which is obtained in advance, and wherein said received-stream composite means combines audio data corresponding to the audio signal synthesized by the voice synthesizing means with the video data which is output from the stream storage means, and accumulates the combined audio data and video data in the stream storage means.

32. A video receiving/decoding device according to Claim 24, wherein the control means selects an object output from the stream storage means, in which a plurality of object-encoded objects are stored, according to a communication destination.

33. A video receiving/decoding device according to Claim 24, wherein the control means selects an object output from the stream storage means, in which a plurality of object-encoded objects are stored, according to communication date and time.

34. A video receiving/decoding device according to Claim 18, wherein the video data is encoded by means of an MPEG-4 method.

35. A video receiving/decoding device according to Claim 25, wherein the audio data is encoded by means of an MPEG-4 method.

36. A video transmitting/receiving device comprising:

a transmission processing unit having:

a medium encoding means for object-encoding either or both of a video signal and an audio signal supplied from the outside;

a transmission stream composite means for combining a part or all of objects encoded by the medium encoding means, with an object which is object-encoded in advance; and

a stream transmitting means for transmitting either or both of video data and audio data combined by the transmission stream composite means; and

a reception processing unit having:

a stream receiving means for receiving either or both of the video data and the audio data which are object-encoded;

a received-stream composite means for combining an object in either or both of the video data and the audio data received by the stream receiving means, with an object which is object-encoded in advance; and

a medium decoding means for decoding either or both of the video data and the audio data combined by the received-stream composite means.

37. A video transmission system comprising:

a video encoding/transmitting device having:

a medium encoding means for object-encoding either or both of a video signal and an audio signal supplied from the outside;

a transmission stream composite means for combining a part or all of objects encoded by the medium encoding means, with an object which is object-encoded in advance; and

a stream transmitting means for transmitting either or both of video data and audio data combined by the transmission stream composite means; and

a receiving device for receiving and decoding either or

both of the video data and the audio data from the video encoding/transmitting device.

38. A video transmission system comprising:

a transmission device for object-encoding either or both of a video signal and an audio signal supplied from the outside, and transmitting a part of objects in either or both of the object-encoded video data and audio data; and

a video receiving/decoding device having:

a stream receiving means for receiving either or both of the object-encoded video data and audio data transmitted from the transmission device;

a received-stream composite means for combining an object in either or both of the video data and the audio data received by the stream receiving means, with an object which is object-encoded in advance; and

a medium decoding means for decoding either or both of the video data and the audio data combined by the received-stream composite means.

ABSTRACT

On the transmission side, an object dividing unit 1 and an object encoding unit 2 object-encode a video signal; an object composite unit 3 combines a part or all of the encoded objects with an object that has been object-encoded in advance; and a line interface unit 8 transmits the combined video data.

FIG. 1

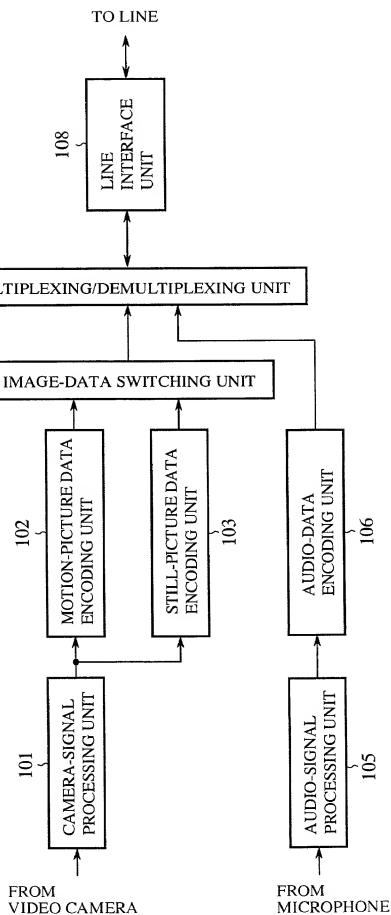


FIG. 2

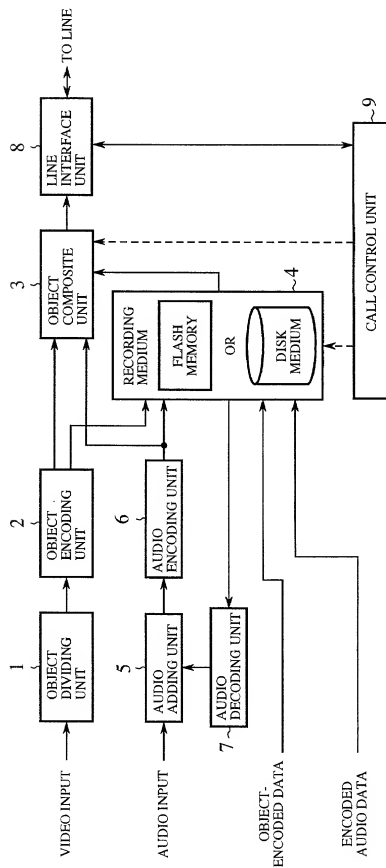


FIG. 3

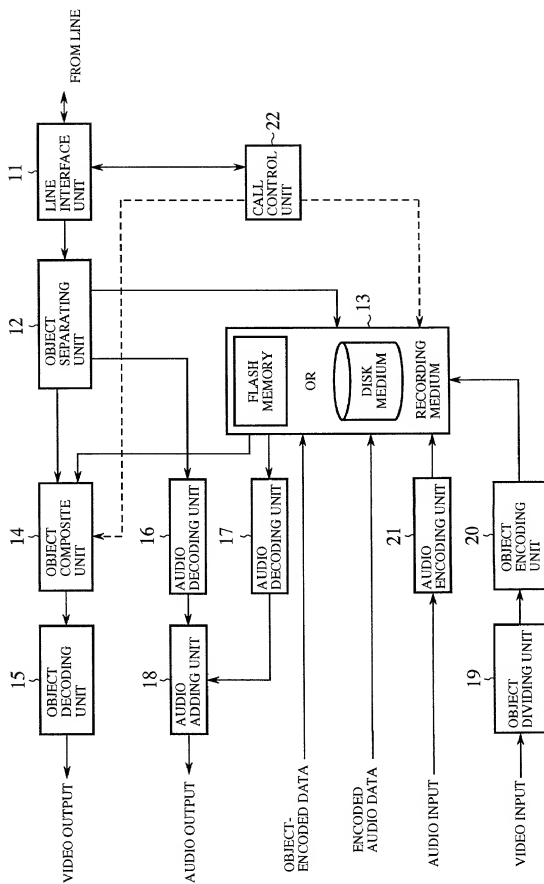


FIG. 4

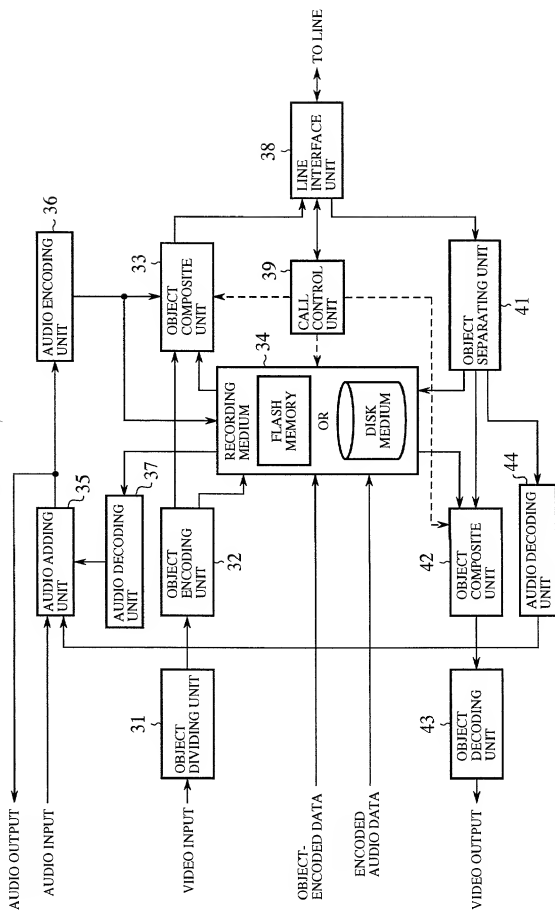


FIG.5

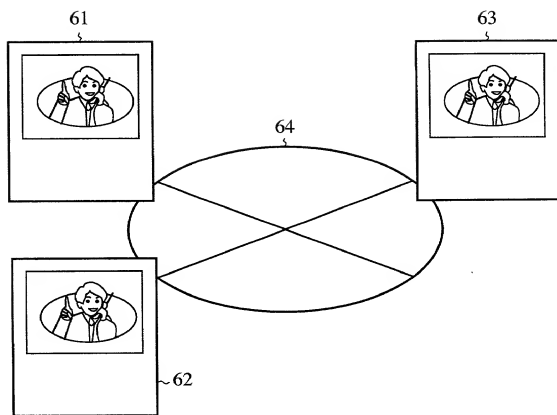


FIG. 6


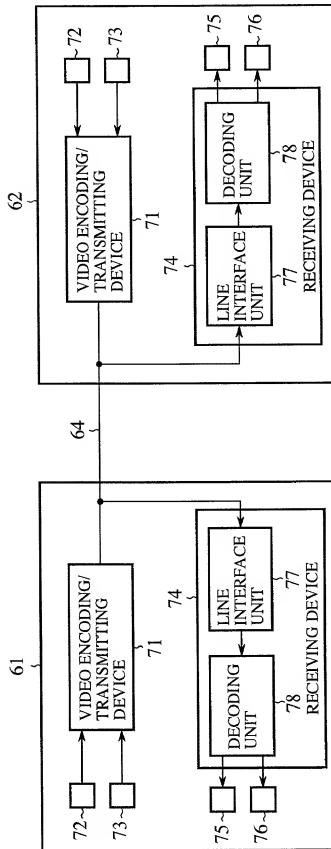


FIG. 7

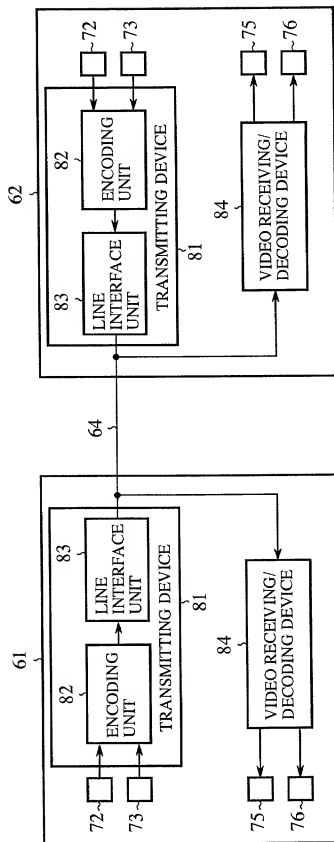

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

"VIDEO ENCODING/TRANSMITTING DEVICE, VIDEO RECEIVING/DECODING DEVICE, VIDEO TRANSMITTING/RECEIVING DEVICE, AND VIDEO TRANSMISSION SYSTEM"

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日 に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
(該当する場合) _____ に訂正されました。☒ was filed on December 5, 2000
as United States Application Number or
PCT International Application Number
PCT/JP00/08603 and was amended on _____
(if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration

(日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一ヶ国を指定している特許協力条約365条(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

11-348081

Japan

7/December/1999

(Number)

(Country)

(Day/Month/Year Filed)

(番号)

(国名)

(出願年月日)

(Number)

(Country)

(Day/Month/Year Filed)

(番号)

(国名)

(出願年月日)

Priority Not Claimed

優先権主張なし

☐☐

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)

(Filing Date)

(Application No.)

(Filing Date)

(出願番号)

(出願日)

(出願番号)

(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)項に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、道邦規則法典第37編15条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)

(Filing Date)

(Status: Patented, Pending, Abandoned)

(出願番号)

(出願日)

(現況: 特許許可済、係属中、放棄済)

(Application No.)

(Filing Date)

(Status: Patented, Pending, Abandoned)

(出願番号)

(出願日)

(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim the benefit under Title 36, United States Code, Section 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of application.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration

(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の
手続きを米特許商標局に対して遂行する弁理士または代理人
として、下記の者を指名いたします。(弁護士、または代理
人の氏名及び登録番号を明記のこと)

TERRELL C. BIRCH (Reg. No. 18,282)
RAYMOND C. STEWART (Reg. No. 21,066)
JOSEPH A. KOLASCH (Reg. No. 22,463)
ANTHONY L. BIRCH (Reg. No. 26,122)

JAMES M. SLATTERY (Reg. No. 28,265)
BERNARD L. SWEENEY (Reg. No. 28,448)
MICHAEL K. MUTTER (Reg. No. 28,680)
CHARLES GORENSTEIN (Reg. No. 28,271)

POWER OF ATTORNEY: As a named inventor, I hereby appoint
the following attorney(s) and/or agent(s) to prosecute this
application and transact all business in the Patent and Trademark
Office connected therewith (list name and registration number)

GERALD M. MURPHY (Reg. No. 28,672)
LEONARD R. SVENSSON (Reg. No. 30,238)
TERRY L. CLARK (Reg. No. 31,541)
ANDREW D. MEIKLE (Reg. No. 32,868)

MARC S. WEINER (Reg. No. 32,181)
ANDREW F. REISH (Reg. No. 32,443)
JOE M. MUNNY (Reg. No. 32,594)
C. JOSEPH FARACI (Reg. No. 32,350)

書類送付先

Send Correspondence to:

BIRCH, STEWART, KOLASCH & BIRCH, LLP
P.O. BOX 747
FALLS CHURCH, VA 22040-0747
TEL: (703) 205-3000

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

BIRCH, STEWART, KOLASCH & BIRCH, LLP
TEL: (703) 205-3000

唯一または第一発明者名

Full name of sole or first inventor
Morio YOSHIMOTO

発明者の署名

日付

Inventor's signature

Date

Morio Yoshimoto

July 11, 2001

住所

Residence

Tokyo, Japan

国籍

Citizenship

Japanese

私書箱

Post Office Address

c/o MITSUBISHI DENKI KABUSHIKI KAISHA

2-3, Marunouchi 2-chome, Chiyoda-ku,
Tokyo 100-8310 Japan

第二共同発明者

Full name of second joint inventor, if any

Yukinari MATSUDA

第二共同発明者

日付

Second inventor's signature

Date

Yukinari Matsuda

July 11, 2001

住所

Residence

Tokyo, Japan

国籍

Citizenship

Japanese

私書箱

Post Office Address

c/o MITSUBISHI DENKI KABUSHIKI KAISHA

2-3, Marunouchi 2-chome, Chiyoda-ku,
Tokyo 100-8310 Japan

(第三以降の共同発明者についても同様に記載し、署名をす
ること)

(Supply similar information and signature for third and subsequent
joint inventors.)

第3の共同発明者の氏名 (該当する場合)		Full name of third joint inventor, if any, <u>3-D</u> <u>Susumu OKA</u>	
同第3発明者の署名	日付	Third Inventor's signature <u>Susumu Oka</u>	Date July 11, 2001
住所	Residence <u>Tokyo, Japan</u> <u>STX</u>		
国籍	Citizenship Japanese		
郵便の宛先	Post Office Address c/o MITSUBISHI DENKI KABUSHIKI KAISHA		
	2-3, Marunouchi 2-chome, Chiyoda-ku, Tokyo 100-8310 Japan		
第4の共同発明者の氏名 (該当する場合)		Full name of fourth joint inventor, if any,	
同第4発明者の署名	日付	Fourth Inventor's signature	Date
住所	Residence		
国籍	Citizenship		
郵便の宛先	Post Office Address		
第5の共同発明者の氏名 (該当する場合)		Full name of fifth joint inventor, if any,	
同第5発明者の署名	日付	Fifth Inventor's signature	Date
住所	Residence		
国籍	Citizenship		
郵便の宛先	Post Office Address		